


- Ergonomic design
- Robust polymer or metal enclosure
- Meets requirements for protection against accidental operation and tampering
- Metal enclosure features a wrist-rest bar which prevents illness due to repetitive actions
- Conforms to EN574 and EN954-1 requirement

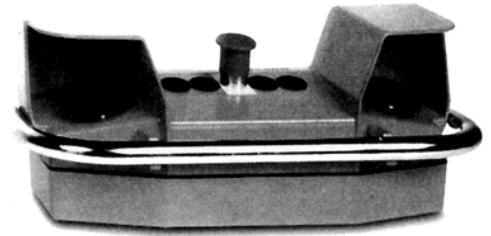

Operating information



Working pressure 3 to 8 bar
 Working temperature -5 °C to +60 °C

Control module only



Symbol	Connections	Order code
 	<p>Ø4 mm Push-in</p>	<p>PXP-A11*</p>

Complete units

Polymer enclosure, with two Ø40 mm push button with protective guards and control module

Symbol	Connections	Number of control modules	Order code
 	<p>Ø4 mm Push-in</p>	<p>1</p>	<p>PXP-C111*</p>

Metal enclosure, with two Ø60 mm push buttons, wrist restbar, built in protective guard and control module

Symbol	Connections	Number of control modules	Order code
 	<p>Push-in Ø6 mm for supply Ø4 mm for output</p>	<p>1</p>	<p>PXP-S111*</p>

* Language of instruction leaflets

Add suffix to order code as shown below

i.e. **PXP-A11D** = Control Module with a German instruction leaflet

Italian	1
German	D
French	F
English	GB
Swedish	S
Spanish	SP